- Induction Heating
- Industrial Automation
- Photovoltaic energy storage

Canroon

Official WeChat

Official website

CV900N High Performance Vector Frequency Inverter

Intelligent Age, Drive The Future



Shenzhen Canroon Electrical Appliances Co., Ltd

Headquarters address : 9/F, Building C, Area 2-B · Skyworth Innovation Valley,Tangtou 1Road, Shiyan Street, Bao'an District ,Shenzhen ,China

Factory address : 8/F, Building 8, Zhongyuntai Hi-tech Ind Zone, Songbai Road,Shiyan Street, Bao'an District, Shenzhen, China.

sales@canroon.com www.canroon.com 0755-26890923 / 26890925

Copyright © Copyright Shenzhen Canroon Electrical Appliances Co., Ltd

Content changes due to the company's continuous product upgrades without prior notice

About Canroon




Canroon is a leading provider of power electronics products and solutions. We focus on the field of power electronics. Our products include induction heating machine, industrial automation and photovoltaic energy storage.


Canroon has a strong product R&D and engineering team. We are committed to transforming wisdom into leading products and services to meet the needs of different customers and continuously create value for customers. With our comprehensive advantages in the field of power electronics, we strive to become the industry leader.

Canroon always adheres to the concept of "co-create, co-share", and uses continuous innovation as a means to bring more reliable products and better solutions to users, and make human and nature more harmonious.






































Enterprise Qualification



High tech enterprise certificate



ISO9001 quality certification



IP authentication



CE certification



Software registration certificate



Appearance Patent Certificate



Utility model patent certificate

Catalogue

Product Features	3~4
Product Application	5
Model Selection	6
Structure And Dimensions	7~9
Optional Accessories	10
Technical Parameter	11
Operation Wiring Diagram	12



CV900N


High Performance Vector Frequency Inverter

CV900N high-performance vector frequency inverter adopts advanced vector frequency conversion control technology, which has large torque at low frequency, fast dynamic torque response and high speed stability accuracy. With high-performance current vector technology, it can easily drive and control motors.

With years of technical precipitation, Canroon frequency inverter can easily solve technical and performance problems encountered in machine tools, petrochemical industry, lifting equipment, natural gas, pulp and paper, ceramics, plastic machinery and other industry equipment.


High performance, high quality, high power density design, as well as significant improvements in easy of use, maintainability, environmental protection, installation space and design standards, can further optimize the user experience.

Excellent Performance

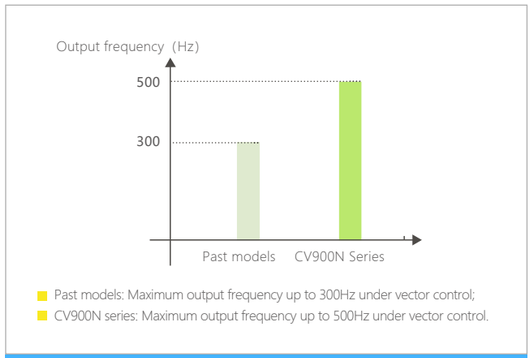


High performance vector control, improve precision control

The maximum output frequency under vector control is 500Hz, which can realize the high-precision speed output within the range of 10 times weak magnetic speed regulation.

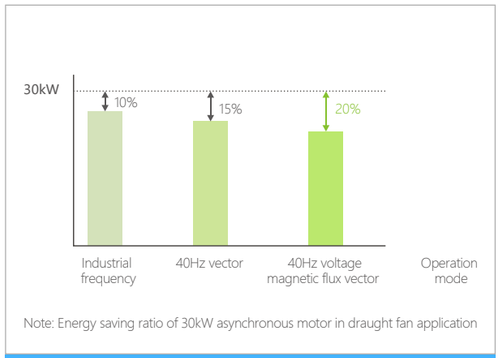


Smart Energy Saving Function

Through the voltage magnetic flux vector algorithm, the closed-loop control of the output voltage is realized; when the motor torque requirement is low, the excitation current is reduced according to the load current; the motor efficiency is maximized; the motor loss and energy loss are reduced.

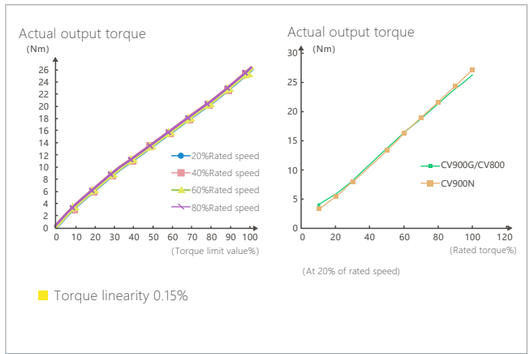

Low speed large torque, stable control at low speed


The torque output is stable, the low frequency torque is large, and it can realize the stable load running at an ultra-low speed of 0.01Hz.

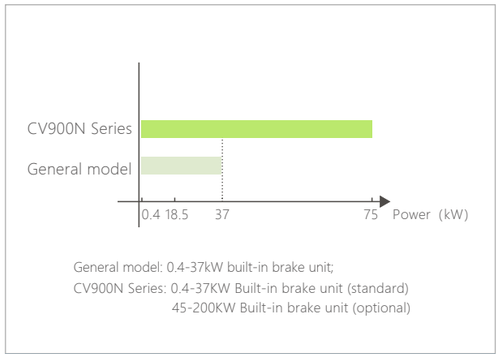

Built-in brake unit


0.4kW~37kW (G) built-in brake unit; Strong braking ability: short-time braking ability can reach 1.1~1.4 times the rated power of the inverter;Brake protection is more comprehensive and intelligent: it has brake resistor short circuit protection, brake circuit overcurrent protection, braking pipe overload protection, braking pipe straight-through detection, etc.

Stable&Reliable

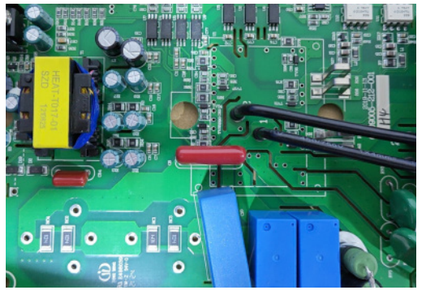

Refined design, stronger and more durable

The modular design of the hardware circuit ensures the stable and efficient operation of the circuit; Selected high-quality components and refined design ensure the entire product life cycle healthy and stability; the automatic spraying process of conformal coating increases the board environmental resistance and comprehensively improves the board protection ability.




Independent air duct design, stronger anti-pollution ability

Structure adopts independent air duct design, free disassembly, can effectively prevent dust into the inverter, avoid short circuit and other faults, improve reliability;The cooling fan with long life and large air volume is selected to effectively reduce the inverter temperature rise and ensure the reliable and stable running of the inverter.



International certification, global support

Higher safety and certification, CE, ISO9001:2015 certification, etc., meet the high-end users equipment export certification requirement.

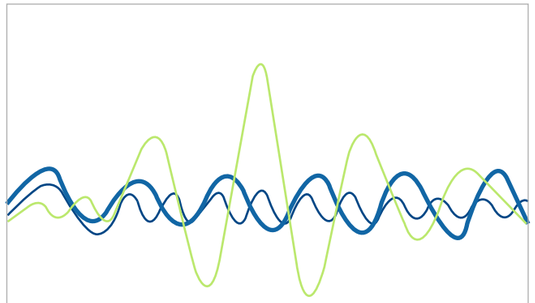

Wide voltage design in line with international standards

Meet the needs of 380-480V three-phase power grids include Europe, North America, India, etc.

Wide Range Applications

More than 80,000 units are sold each year and more than 300,000 are in running in the market.

In China, the United States, Germany, Brazil, India, Vietnam, the Middle East and other dozens of countries around the world, more than 300,000 units have been operating in various industries, driving global industrial development.



Machine tools




Petrochemical industry



Hoisting Machinery



Natural gas

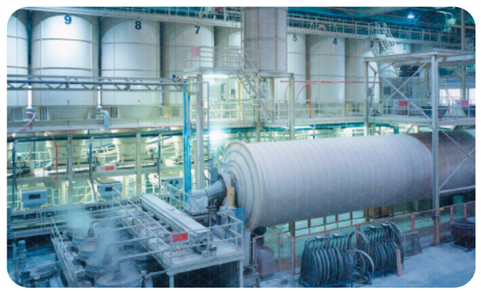

Ceramics



Plastic machinery

Model Selection

Naming Rules

CV900N - 007 G -1 4 T B

① ② ③ ④ ⑤ ⑥ ⑦

①	Product series	CV900N (Inverter series)
②	Model power	00A：0.4KW~1500：1500KW
③	Load type	G：Constant torque P: variable torque
④	Output	1：3-phase
		2：1-phase
⑤	Voltage level	1：110V
		2：220V
		4：380V
⑥	Input	S：1-phase
		T：3-phase
⑦	Cooling mode	B：Air cooling (with built-in brake unit)
		F：Air cooling(No built-in brake unit)

Technical Index and Specification

Specification model	Rated Power (KW)	Rated output current (A)
1-phase 220V 50/60Hz		
CV900N-00AG/00BP-12SB	0.4/0.75	2.4/4.5
CV900N-00BG/001P-12SB	0.75/1.5	4.5/7
CV900N-001G/002P-12SB	1.5/2.2	7/10
CV900N-002G/004P-12SB	2.2/4	10/16
CV900N-004G/005P-12SB	4/5.5	16/20
CV900N-005G/007P-12SB	5.5/7.5	20/30
CV900N-007G/011P-12SB	7.5/11	30/42
CV900N-011G/015P-12SB	11/15	42/60

Specification model	Rated Power (KW)	Rated output current (A)
3-phase 380V 50/60Hz		
CV900N-00BG/001P-14TB	0.75/1.5	2.5/3.7
CV900N-001G/002P-14TB	1.5/2.2	3.7/5
CV900N-002G/004P-14TB	2.2/4	5/9
CV900N-004G/005P-14TB	4/5.5	9/13
CV900N-005G/007P-14TB	5.5/7.5	13/17
CV900N-007G/011P-14TB	7.5/11	17/25
CV900N-011G/015P-14TB	11/15	25/32
CV900N-015G/018P-14TB	15/18.5	32/37
CV900N-018G/022P-14TB	18.5/22	37/45
CV900N-022G/030P-14TB	22/30	45/60
CV900N-030G/037P-14TB	30/37	60/75
CV900N-037G/045P-14TB	37/45	75/90

Specification model	Rated Power (KW)	Rated output current (A)
3-phase 380V 50/60Hz		
CV900N-045G/055P-14TF	45/55	90/110
CV900N-055G/075P-14TF	55/75	110/150
CV900N-075G/090P-14TF	75/90	150/176
CV900N-090G/110P-14TF	90/110	176/210
CV900N-110G/132P-14TF	110/132	210253
CV900N-132G/160P-14TF	132/160	253/300
CV900N-160G/185P-14TF	160/185	300/340
CV900N-185G/200P-14TF	185/200	340/380
CV900N-200G/220P-14TF	200/220	380/420
CV900N-220G-14TF	220	420
CV900N-250G-14TF	250	470
CV900N-280G-14TF	280	520
CV900N-315G-14TF	315	600
CV900N-355G-14TF	355	640
CV900N-400G-14TF	400	750
CV900N-450G-14TF	450	830
CV900N-500G-14TF	500	930
CV900N-630G-14TF	630	1150
CV900N-750G-14TF	750	1360
CV900N-800G-14TF	800	1500
CV900N-1000G-14TF	1000	2000
CV900N-1200G-14TF	1200	2400
CV900N-1500G-14TF	1500	2850

Structure and Dimensions

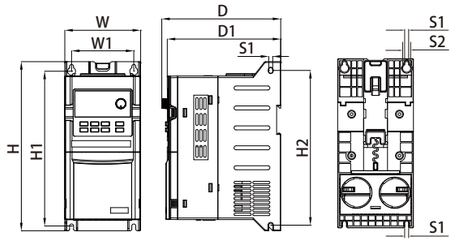


Figure 1: CV900N-00AG/00BP-12SB ~ 005G/007P-14TB

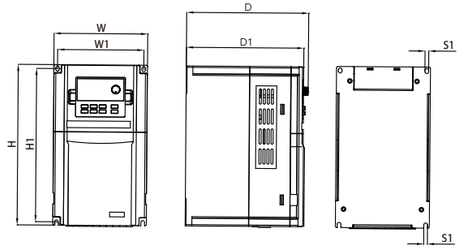


Figure 2: CV900N-004G/005P-12SB ~ 011G/015P-14TB

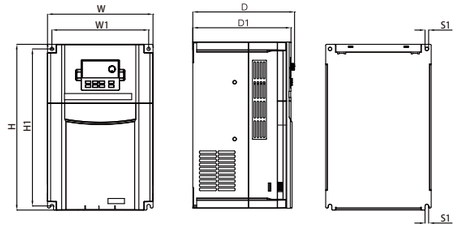


Figure 3: CV900N-007G/011P-12SB ~ 022G/030P-14TB

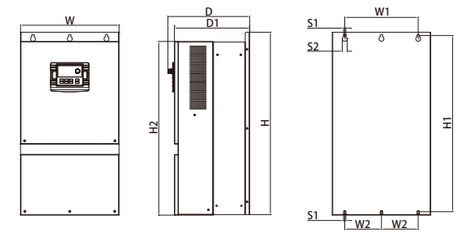


Figure 4: CV900N-030G/037P-14TB ~ 160G/185P-14TF

Specification model	Overall dimensions (mm)				Installation hole position (mm)			Installation hole diameter (mm)		Figure
	W (mm)	H (mm)	D (mm)	D1 (mm)	W1 (mm)	H1 (mm)	H2 (mm)	S1 (mm)	S2 (mm)	
CV900N-00AG/00BP-12SB	95	212	149	142	78	194	194	Ø10	Ø5	1
CV900N-00BG/001P-12SB										
CV900N-001G/002P-12SB										
CV900N-002G/004P-12SB										
CV900N-00BG/001P-14TB										
CV900N-001G/002P-14TB										
CV900N-002G/004P-14TB										
CV900N-004G/005P-14TB										
CV900N-005G/007P-14TB										
CV900N-004G/005P-12SB	140	240	183	176	129	229	/	Ø5.5	/	2
CV900N-005G/007P-12SB										
CV900N-007G/011P-14TB										
CV900N-011G/015P-14TB										

Specification model	Overall dimensions (mm)					Installation hole position (mm)			Installation hole diameter (mm)		Figure
	W (mm)	H (mm)	D (mm)	D1 (mm)	H2 (mm)	W1 (mm)	W2 (mm)	H1 (mm)	S1 (mm)	S2 (mm)	
CV900N-007G/011P-12SB	205	322	197	190	/	188	/	305	Ø6.5	/	3
CV900N-011G/015P-12SB											
CV900N-015G/018P-14TB											
CV900N-018G/022P-14TB											
CV900N-022G/030P-14TB											
CV900N-030G/037P-14TB	270	463	223.9	206.3	437.7	201.5	/	444.5	Ø6.5	Ø13.5	4
CV900N-037G/045P-14TB											
CV900N-045G/055P-14TF	320	522	257.6	240	489	200	100	499	Ø9	Ø16.5	
CV900N-055G/075P-14TF											
CV900N-075G/090P-14TF	340	720	305.6	288	663	260	130	700.5	Ø9	Ø16.5	
CV900N-090G/110P-14TF											
CV900N-110G/132P-14TF											
CV900N-132G/160P-14TF	380	720	305.6	288	663	260	130	700.5	Ø9	Ø16.5	
CV900N-160G/185P-14TF											

Structure and Dimensions

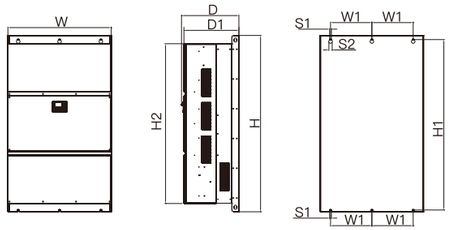


Figure 5：CV900N-185G/200P ~ 500G-14TF

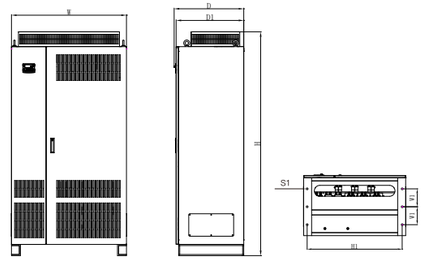


Figure 6：CV900N-630G ~ 1500G-14TF

Specification model	Overall dimensions (mm)					Installation hole position (mm)			Installation hole diameter (mm)		Figure
	W (mm)	H (mm)	D (mm)	D1 (mm)	H2 (mm)	W1 (mm)	W2 (mm)	H1 (mm)	S1 (mm)	S2 (mm)	
CV900N-185G/200P-14TF	470	830	347.1	329.5	743	343	171.5	791	Ø11	Ø24	5
CV900N-200G/220P-14TF											
CV900N-220G-14TF											
CV900N-250G-14TF	540	1060	416.6	399	970	420	210	1031.5	Ø13	Ø26	
CV900N-280G-14TF											
CV900N-315G-14TF											
CV900N-355G-14TF	650	1090	416.6	399	1000	420	210	1061.5	Ø13	Ø26	
CV900N-400G-14TF											
CV900N-450G-14TF	750	1280	416.6	399	1160	600	300	1237	Ø13	Ø26	
CV900N-500G-14TF											
CV900N-630G-14TF	1024.5	1906	620	602.5	/	180	/	954.5	Ø18	/	6
CV900N-750G-14TF											
CV900N-800G-14TF	1332	1909.5	720	702.5	/	225	/	1262	Ø18	/	
CV900N-1000G-14TF											
CV900N-1200G-14TF	1732	1909.5	770	752.5	/	250	/	1662	Ø18	/	
CV900N-1500G-14TF											

Optional Accessories



LED keyboard



Keyboard base



Keyboard connector



Brake unit



Input/output filter



Brake resistor



Input and output reactor


Technical Parameter

	Functional description		Specification index
Input	Rated Voltage,Frequency		3-phase (4T) AC 380V, 47-63Hz; 1-phase (2S) AC 220V, 47-63 Hz
	Allowed Voltage Range		3-phase (4T) AC 320V～480V; 1-phase (2S) AC 160V～260V
Output	Voltage		14T，0～480V；12S，0～260V
	Frequency		Vector control: 0~500Hz V/F control: 0~1000Hz
	Overload Capacity		150% rated current 60s, 180% rated current 5s; 195% rated current 0.5s
Control Mode			V/F control, speed-sensor-less vector control (SVC)
Control Character	Frequency Setting Resolution	Analog Input	Maximum frequency X0.025%
		Digital Setting	0.01Hz
	V/F Control	V/F Curve(voltage frequency character)	Three types: linear type; multi-point type; Nth power type V/F curve (to the power of 1.2, 1.4,1.6,1.8,2)
		V/F separation	2 types: full separation, half separation
		Torque Compensation	Manual setting: 0.0~30% of rated output Automatic compensation: according to output current and motor parameter
		Automatic Currentlimiting and Voltage-limiting	During acceleration, deceleration or steady running, detect automatically the current and voltage of motor stator, and control it within bounds based on unique algorithm, minimize fault-trip chanc
	Senseless Vector Control	Voltage Frequency Character	Adjust pressure/frequency ratio according to motor parameter and unique algorithm
		Torque Character	Starting torque:150% rated torque at 1.0Hz (VF control) 150% rated torque at 0.25Hz (SVC) Running speed steady-state accuracy: ≤±0.2% of rated synchronous speed Speed fluctuation: ≤±0.5% rated synchronous speed Torque response: ≤20ms (SVC)
		Motor Parameter Self-measurement	Being able to detect parameter automatically under static state and dynamic state of motor, thus guarantee an optimum control.
		Current and Voltage Restrain	Current closed-loop control, free from current impact, perfect restrain function of overcurrent and overvoltage
	Undervoltage Restrain during Running		Specially for users with a low or unsteady voltage power grid: even lower than the allowable voltage range, the system can maintain the longest possible operating time based on its unique algorithm and residual energy allocation strategy
Typical Function	Multi-velocity and Traverse Operation		16 segments programmable multi-velocity control, multiple operation mode. Traverse operation: preset frequency and center frequency adjustable, parameter memory and recovery after power cut.
	PID Control RS485 Communication		Built-in PID controller (frequency can be preset) Standard RS485 communication function
	Frequency Setting	Analog Input	Direct voltage 0~10V, direct current 0~20mA (optional up limit and lower limit)
		Digital Input	Operation panel setting, RS485 port setting, UP/DOWN terminal control, or combined with analog input
	Output Signal	Digital Output	2-channel Y terminal open collector output and 2-channel programmable relay output-TA, TB, TC (NPN version)
			1-channel Y terminal open collector output and 2-channel programmable relay output-TA, TB, TC (NPN+PNP version)
		Analog Output	2 channel analog signal output, output ranging within 0~20mA or 0~10V with flexibly setting, achievable output of physical quantities like set frequency, output frequency
	Automatic Steady voltage Operation		Dynamic steady state, static steady state, and unsteady voltage for choices to obtain the steadiest operation
	Acceleration and Deceleration Time Setting		0.0s～65000.0s can be set continuously, S-type and linear type are optional
	Brake	Dynamic Braking	Dynamic braking initial voltage, backlash voltage and dynamic braking continuous adjustable
		DC Braking	Halt DC braking initial frequency: 0.00~[F00.10] Max.frequency Braking time: 0.0~100.0s; Braking current: 0.0%~100.0% of rated current
	Low Noise Running		Carrier frequency 0.5kHz~16.0kHz continuous adjustable, minimize motor noise
	Speed Tracking and Restart Function		Smooth restart during operation, instantaneous stop and restart
	Counter		A built-in counter, facilitate system integration
	Operation Function		Upper limit and lower limit frequency setting, frequency hopping operation, reversal running restraint, slip frequency compensation, RS485 communication, frequency control of progressive increase and decrease, failure recovery aomatically, etc.
Display	Operation Panel Display	Running State	Output frequency, output current, output voltage, motor speed, set frequency, module temperature, PID setting, feedback, analog input and output.
		Alarm	There are 8 running parameter records include output frequency, set frequency, output current, output voltage, DC voltage, module temperature, power-on time, and running time when tripped by three-time faults.
Protective Function			Overcurrent, overvoltage, undervoltage, module fault, electric thermal relay, overheat, short circuit, default phase of input and output, motor parameter adjustment abnormality, internal memory fault, etc.
Environment	Ambient Temperature		-10°C ~ +40°C (please run the VFD in derated capacity when ambient temperature is 40°C~50°C)
	Ambient Humidity		5%~95%RH, without condensing drops
	Surroundings		Indoors (without direct sunlight, corrosive or flammable gas, oil fog and dust)
	Altitude		Running in derated capacity above 1000m, derate 10% for every 1000m rise.
Structure	Protection Level		IP20
	Cooling Method		Air cooling with fan control
Installation Method			Wall-hanging type

Operation Wiring Diagram

The wiring parts of VFD include maior loop and control loop. Open the cover of I/0 terminals, users can see the maior loop terminaand control loop terminal, and the users must clearly select the model and connect accurately according to the wiring circuitdiagrams of different models listed below.


(1)NPN version

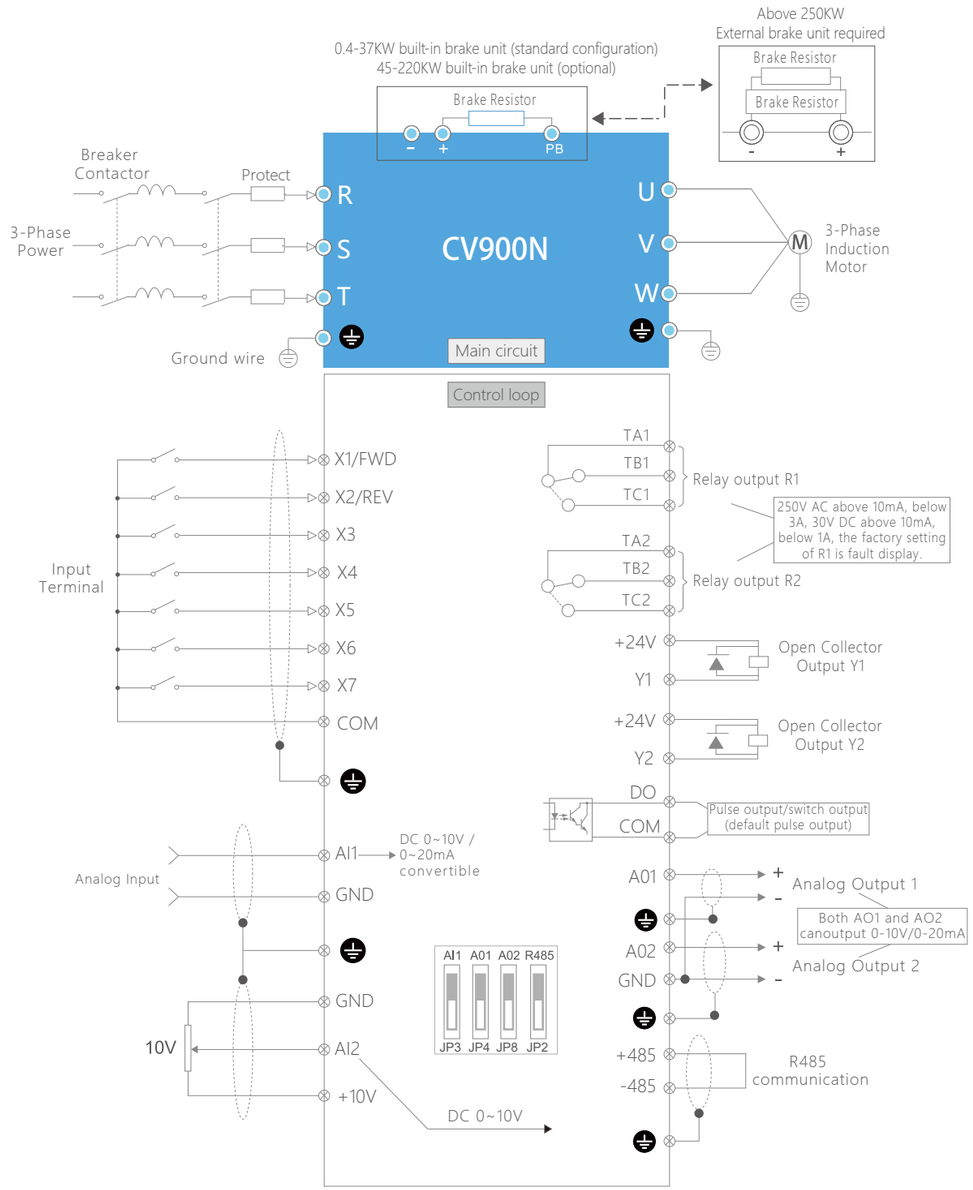

Operation Wiring Diagram

(2)NPN+PNP version

CV900N-00AG/00BG-12SB~CV900N-022G/030P-14TB

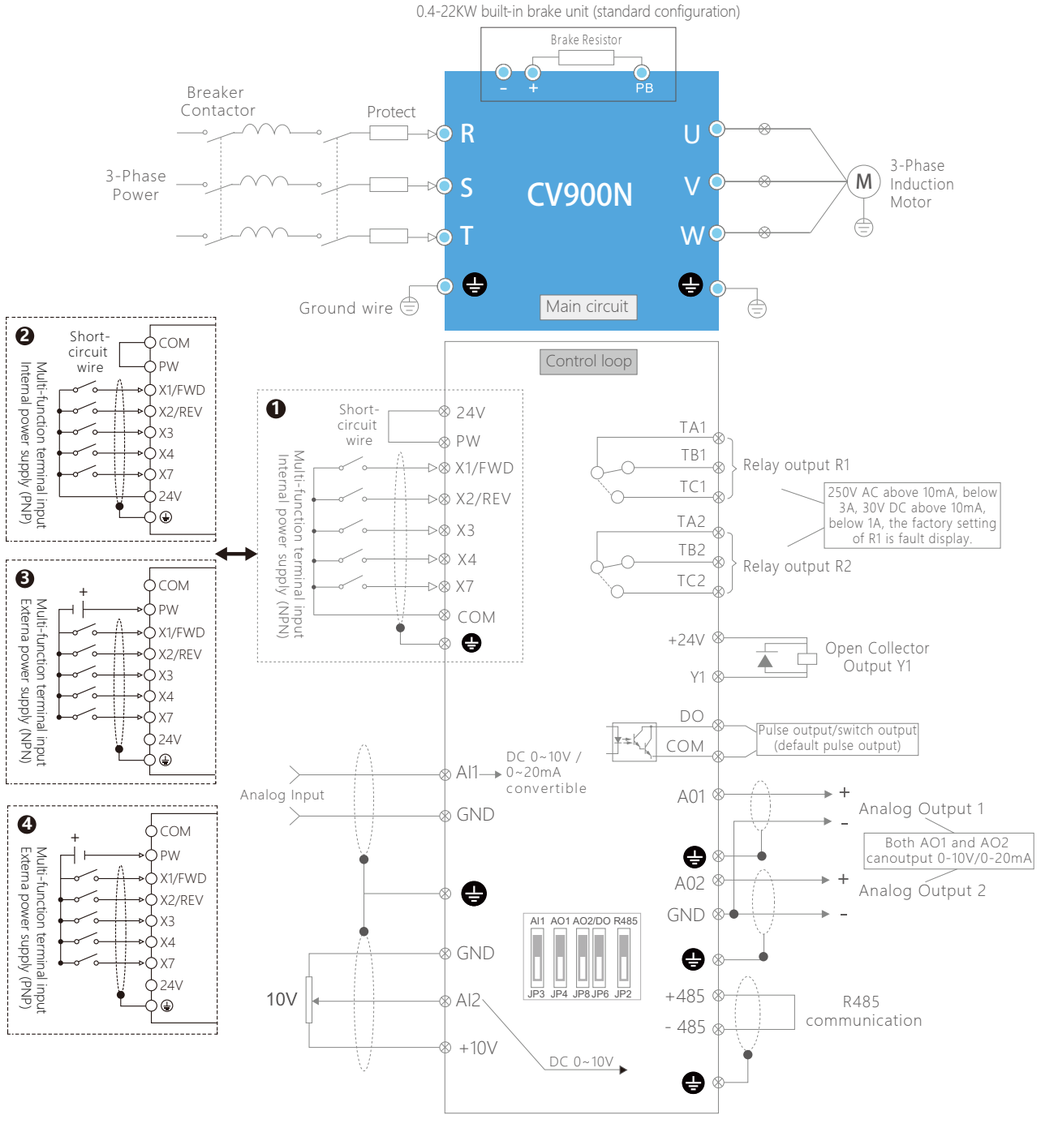

CV900N-030G/037P-14TB ~ CV900N-1500G-14TF

